


# Effects Projector

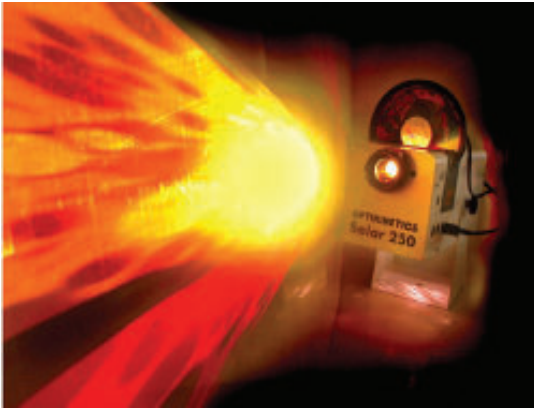

A wide variety of visual effects can be obtained from the effects projector. By changing the effects wheel, images ranging from abstract patterns to particular themes can be projected.

Effects wheels are changed by releasing the screw on the wheel hub and sliding the wheel forward. Please consult with staff members who have been trained by Technical Solutions before changing the effects wheels.

**Step 1.** ALWAYS unplug the projector BEFORE removing lamp cover and wait until it is completely cool.

If necessary, remove the projector from the wall by unscrewing the two black knobs on each side. This is easier if a second person helps to hold the projector.

**Step 2.** Use a Philips screwdriver to take out the screw holding the lamp cover in place. Tilt the cover up, and then out of its slot.

**Step 3.** Pull the lamp straight up and out of the socket. Small sideways “wobbles” may help - it will be fairly stiff. Be careful not to get fingerprints on the glass lens or the reflector.


**Step 4.** Break the end of the protective bag and slide the globe half way out - *without touching the glass*. Never touch a new globe with your skin. The fingerprints will burn on the globe.

**Step 5.** Holding the globe with its bag, line up the two pins with the socket, and then ease them down. It will take a bit of downward pressure to get the globe in. Remove the protective bag and replace the lamp housing cover.

Always keep a spare globe. If you have a replacement globe handy, you won't be stuck without a projector. Replacement projector globes can be ordered from Technical Solutions



Globe

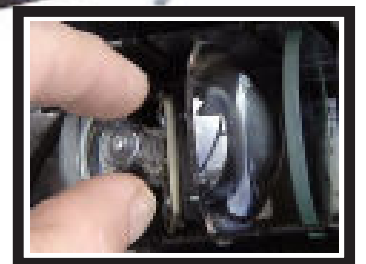

**Never touch a new globe with your skin.**

